

220-240V
50/60 HzIP
20

Suspended decorative luminaire for LED light sources.

TECHNICAL DATA

Mounting: suspended, on wire suspension (included)**Body:** plastic polyester reinforced with fiberglass**Colour:** white, black**Diffuser:** opal plexiglass (PLX), microprismatic diffuser (MPRM)

ELECTRICAL DATA

Power: 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED**Way of lighting:** direct

OPTICAL DATA

GENERAL DATA

Available on request: opal diffuser, DALI, DIM 1..10V**Warranty:** 5 years**Application:** offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques

| Code | Luminaire power [W] | Lumen luminaire [lm] | Efficacy [lm/W] | Colour temperature [K] | CRI/Ra |
|---|---------------------|----------------------|-----------------|------------------------|--------|
| Diffuser: opal plexiglass (PLX) | | | | | |
| 20002X.5L01.1X1 | 109 | 12300 | 113 | 4000 | ≥80 |
| 20002X.5L02.1X1 | 109 | 11900 | 109 | 3000 | ≥80 |
| Diffuser: microprismatic diffuser (MPRM) | | | | | |
| 20002X.5L01.1X2 | 109 | 12850 | 118 | 4000 | ≥80 |
| 20002X.5L02.1X2 | 109 | 12400 | 114 | 3000 | ≥80 |

20002 [] .5L01.1 [] 2

Colour of decorative elements

- 1 ■ pink
- 2 ■ red
- 3 ■ green
- 4 ■ blue
- 5 ■ yellow
- 6 ■ white
- 7 ■ black

Body colour

- 1 ■ white
- 3 ■ black

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.


Up-to-date product info available on our website www.flashdq.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

Date of issue: 27-3-2019

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires


| Code | Dimensions [mm] L W H | Mounting dimensions [mm] L D | Pallet quantity | Quantity in package | Net weight [kg] |
|---|-----------------------------|------------------------------------|--------------------|---------------------------|-----------------------|
| Diffuser: opal plexiglass (PLX) | | | | | |
| 20002X.5L01.1X1 | 886 886 1060 | 400 80 | 1 | 1 | 21.0 |
| 20002X.5L02.1X1 | 886 886 1060 | 400 80 | 1 | 1 | 21.0 |
| Diffuser: microprismatic diffuser (MPRM) | | | | | |
| 20002X.5L01.1X2 | 886 886 1060 | 400 80 | 1 | 1 | 21.0 |
| 20002X.5L02.1X2 | 886 886 1060 | 400 80 | 1 | 1 | 21.0 |

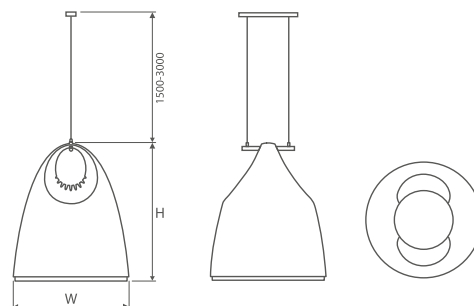

OTHER PICTURES



LIGHT BEAM CURVES



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com


Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

Date of issue: 27-3-2019

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

WAY OF LIGHTING


200023.5L01.112

**OTHER PROJECTS**

Hamama Bilo, Tel Aviv, Israel



Frikirken Church, Norway

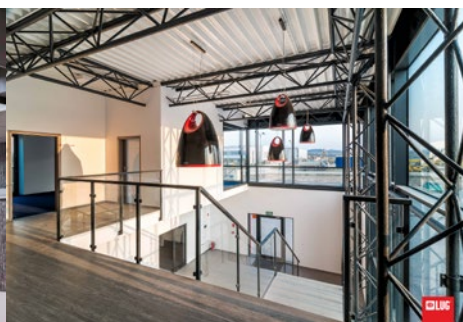

Sieper, Złotoryja, Poland

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

Date of issue: 27-3-2019

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires