


Group in catalogue: INDUSTRIAL LUMINAIRES




Modern decorative luminaire, intended for mounting inside offices, apartments and lofts, for LED light sources.

TECHNICAL DATA	Mounting: on wire suspension (on request)
	Body: plastic
	Colour: transparent
	Diffuser: polycarbonate
ELECTRICAL DATA	Power supply efficiency: >90%
	Power: 220-240V 50/60Hz
	Includes light source: yes
	Type of equipment: ED
	Electrical connection: max 3x0,75 mm ² wire
OPTICAL DATA	Light distribution: omnidirectional
	Way of lighting: direct
	Type of optic: diffuser
	Louwer: louwer
	ULOR / DLOR: 10/90
GENERAL DATA	Lifetime (L90B10): 50 000 h
	Available on request: DALI
	Other remarks: in order to apply the luminaire in an aggressive environment a consultation with the LUG Technical Preparation of Production Branch is required
	Warranty: 5 years
	Application: offices, flats, lofts

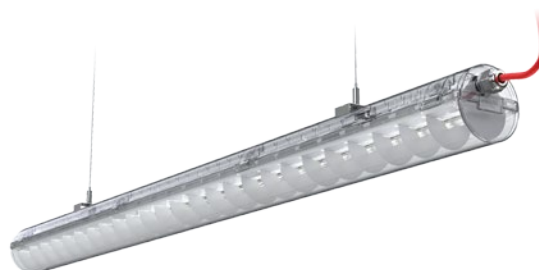

Code	Degree of water and dust protection	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Type: white wire						
090390.5L01.201	IP20	24	3750	156	3000	≥80
090390.5L02.201	IP20	24	3750	156	4000	≥80
090390.5L07.201	IP20	24	3150	131	2700	≥80
090390.5L03.201	IP20	32	4950	155	3000	≥80
090390.5L04.201	IP20	32	4950	155	4000	≥80
090390.5L08.201	IP20	32	4150	130	2700	≥80
Type: red wire						
090390.5L01.204	IP20	24	3750	156	3000	≥80
090390.5L02.204	IP20	24	3750	156	4000	≥80
090390.5L07.204	IP20	24	3150	131	2700	≥80
090390.5L03.204	IP20	32	4950	155	3000	≥80
090390.5L04.204	IP20	32	4950	155	4000	≥80
090390.5L08.204	IP20	32	4150	130	2700	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] D	Pallet quantity	Net weight [kg]
Type: white wire				
090390.5L01.201	1245 100 90	766	120	2.0
090390.5L02.201	1245 100 90	766	120	2.0
090390.5L07.201	1245 100 90	766	120	2.0
090390.5L03.201	1245 100 90	766	120	2.0
090390.5L04.201	1245 100 90	766	120	2.0
090390.5L08.201	1245 100 90	766	120	2.0

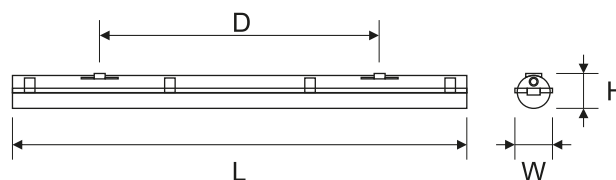


The luminaires are not intended for mounting in places exposed to atmospheric conditions, in car washes, in rooms where washing with pressure washers is used, in livestock rooms, in aggressive environments, etc.
In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.
Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for Ta=25°C.

Group in catalogue: INDUSTRIAL LUMINAIRES

Code	Dimensions [mm] L W H	Mounting dimensions [mm] D	Pallet quantity	Net weight [kg]
Type: red wire				
090390.5L01.204	1245 100 90	766	120	2.0
090390.5L02.204	1245 100 90	766	120	2.0
090390.5L07.204	1245 100 90	766	120	2.0
090390.5L03.204	1245 100 90	766	120	2.0
090390.5L04.204	1245 100 90	766	120	2.0
090390.5L08.204	1245 100 90	766	120	2.0

OTHER PICTURES



ACCESSORIES



150060.00062

Suspension hanger MINI


 150061.00066
 150062.00067

Mechanical round suspension with supply connector


 150061.00063
 150062.00064


Mechanical round suspension



150060.00987

Gripper (1 pcs.)

LIGHT BEAM CURVES




WAY OF LIGHTING

090390.5L01.201

The luminaires are not intended for mounting in places exposed to atmospheric conditions, in car washes, in rooms where washing with pressure washers is used, in livestock rooms, in aggressive environments, etc. In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required. Luminous flux tolerance +/- 10%. Power tolerance +/- 5%. Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com. Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet. The parameters in the data sheet are given for Ta=25°C.

ATLANTYK 2.0 LOFT LED

Group in catalogue: INDUSTRIAL LUMINAIRES



The luminaires are not intended for mounting in places exposed to atmospheric conditions, in car washes, in rooms where washing with pressure washers is used, in livestock rooms, in aggressive environments, etc.
In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.
Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.