


 220-240V
50/60 Hz

 IK
05

 IP
20


Decorative lighting luminaire for LED light sources.

TECHNICAL DATA
Mounting: stand-alone

Body: steel sheet, powder coated aluminum, plastic, wood

Colour: white, black

Diffuser: transparent (PMMA), opal matt (PMMA)

Power supply efficiency: >80%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

Electrical connection: cable with plug 1,3 m

OPTICAL DATA
Light distribution: rotationally-symmetric

Way of lighting: direct

GENERAL DATA
Lifetime (L80B10): 50 000 h

Operating temperature range: 0° C ... +35° C

Additional information: A perfect combination of aesthetics and ergonomics, classic elegance.

Warranty: 5 years

Application: hotels, offices, residences, interiors



Code	Diffuser	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Type: Ø 280						
26008X.5L01.201	transparent (PMMA)	6	640	107	2700	80
26008X.5L01.202	opal matt (PMMA)	6	640	107	2700	80
26008X.5L02.201	transparent (PMMA)	6	710	118	3000	80
26008X.5L02.202	opal matt (PMMA)	6	710	118	3000	80
26008X.5L03.201	transparent (PMMA)	6	740	123	4000	80
26008X.5L03.202	opal matt (PMMA)	6	740	123	4000	80

 26008 .5L01.201

Colour

- 1 white
3 black

Code	Dimensions [mm] W H	Pallet quantity	Quantity in package	Net weight [kg]
Type: Ø 280				
26008X.5L01.201	280 450	24	1	1.4
26008X.5L01.202	280 450	24	1	1.4
26008X.5L02.201	280 450	24	1	1.4
26008X.5L02.202	280 450	24	1	1.4
26008X.5L03.201	280 450	24	1	1.4
26008X.5L03.202	280 450	24	1	1.4



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

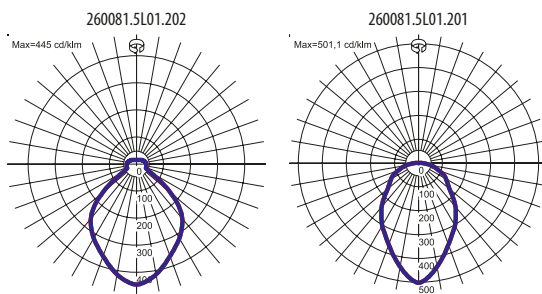
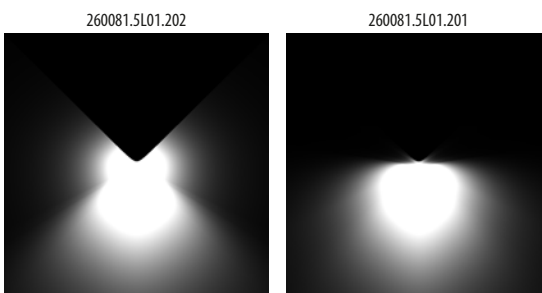
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

 Up-to-date product info available on our website www.flashdq.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

OTHER PICTURES**LIGHT BEAM CURVES****WAY OF LIGHTING**

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.