


 220-240V  
50/60 Hz

 IK  
06

 IP  
20

 IP  
20/54


Decorative downlight luminaire, adapted for tool-free assembly, for suspended ceilings, for LED light sources. The luminaire in round version with different angles of light distribution.

**TECHNICAL DATA**
**Mounting:** in the ceiling, with mounting brackets (included)

**Body:** aluminum

**Colour:** white, black

**Diffuser:** polycarbonate

**ELECTRICAL DATA**
**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** ED, DALI

**Electrical connection:** max 2x1,5 mm<sup>2</sup> wire, max 4x1,5 mm<sup>2</sup> wire

**OPTICAL DATA**
**Light distribution:** rotationally-symmetric

**Way of lighting:** direct

**Reflector:** polished faceted

**GENERAL DATA**
**Lifetime (L80B10):** 60 000 h

**Additional information:** Safe power supply with low voltage SELV

**Warranty:** 5 years

**Application:** public utility facilities, delicatessen, supermarkets, shopping centers, offices, car showrooms, pathways, halls, classrooms, corridors, flats


Code	Colour	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
<b>Type: IP20</b>							
030601.XL01.3XX	white	6	700	117	3000	≥80	0 ... +45
030601.XL02.3XX	white	6	700	117	4000	≥80	0 ... +45
030603.XL01.3XX	black	6	700	117	3000	≥80	0 ... +45
030603.XL02.3XX	black	6	700	117	4000	≥80	0 ... +45
<b>Type: IP20/54, IK06</b>							
030721.XL01.3XX	white	6	640	107	3000	≥80	0 ... +45
030721.XL02.3XX	white	6	640	107	4000	≥80	0 ... +45
030723.XL01.3XX	black	6	640	107	3000	≥80	0 ... +45
030723.XL02.3XX	black	6	640	107	4000	≥80	0 ... +45

030601.	<input type="checkbox"/>	L01.3	<input type="checkbox"/>	<input type="checkbox"/>	Bezel colour
	1	<input type="checkbox"/>	white		
	3	<input type="checkbox"/>	black		
	4	<input type="checkbox"/>	silver		
	5	<input type="checkbox"/>	gold		
			Beam angle		
	1		34°		
	2		45°		
	3		60°		
			Type of equipment		
	5		ED		
	3		DALI		

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.



 Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

Group in catalogue: DOWNLIGHT LUMINAIRES

Code	Dimensions [mm] W H	Mounting dimensions [mm] ØS	Pallet quantity	Quantity in package	Net weight [kg]
<b>Type: IP20</b>					
030601.XL01.3XX	55 47	48	360	1	0.2
030601.XL02.3XX	55 47	48	360	1	0.2
030603.XL01.3XX	55 47	48	360	1	0.2
030603.XL02.3XX	55 47	48	360	1	0.2
<b>Type: IP20/54, IK06</b>					
030721.XL01.3XX	60 53	48	360	1	0.2
030721.XL02.3XX	60 53	48 </td <td>360</td> <td>1</td> <td>0.2</td>	360	1	0.2
030723.XL01.3XX	60 53	48	360	1	0.2
030723.XL02.3XX	60 53	48	360	1	0.2



## OTHER PICTURES



IP20/54




INTO R family


 finalist  
of the competition


2020

## LIGHT BEAM CURVES

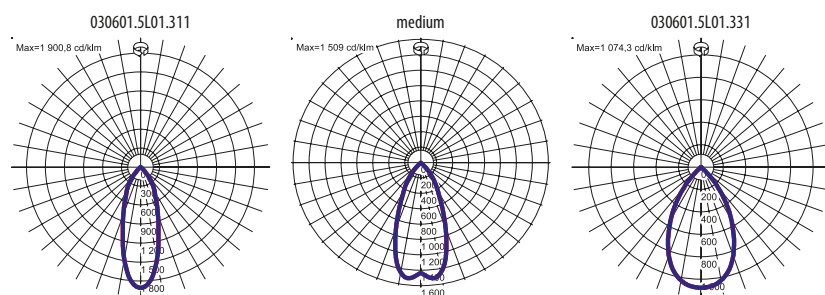

## WAY OF LIGHTING

030601.5L01.311

medium

030601.5L01.331

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.


Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

# INTO R55 LED

Group in catalogue: DOWNLIGHT LUMINAIRES

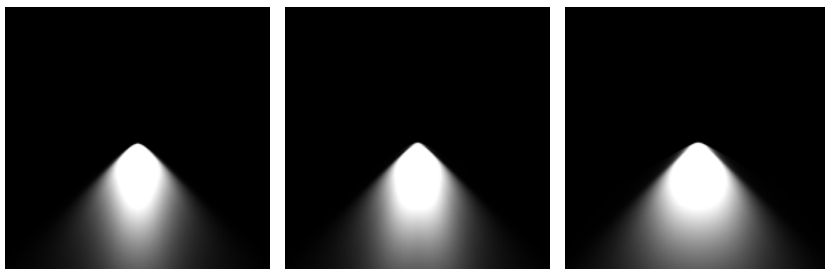

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.