

220-240V  
50/60 HzIK  
06IP  
20

Recessed modern downlight, for LED light sources, for suspended ceilings.

#### TECHNICAL DATA

**Mounting:** in the ceiling, with mounting brackets (included)

**Body:** high pressure die-cast aluminum

**Colour:** white

#### ELECTRICAL DATA

**Power supply efficiency:** >85%

**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** ED

**Electrical connection:** max 2x1,5 mm<sup>2</sup> wire

#### OPTICAL DATA

**Light distribution:** circular

**Way of lighting:** direct

**Reflector:** aluminum polished faceted

#### GENERAL DATA

**Lifetime (L80B10):** 40 000 h

**Lifetime (L80B50):** 60 000 h

**Operating temperature range:** 0°C ... +30°C

**Available on request:** DALI

**Additional information:** The possibility of using one or more power supplies in the luminaire.

**Additional equipment:** lamp rings made of black die-cast aluminium


**Warranty:** 5 years

**Application:** boutiques, delicatessen, supermarkets, jeweler, museums, reception desks, restaurants



Code	Beam angle	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
030331.5L21.331	22°	36	3000	83	3000	≥80
030331.5L21.332	30°	36	2900	81	3000	≥80
030331.5L21.333	42°	36	2900	81	3000	≥80
030331.5L22.331	22°	36	3000	83	4000	≥80
030331.5L22.332	30°	36	2900	81	4000	≥80
030331.5L22.333	42°	36	2900	81	4000	≥80
030331.5L23.341	22°	50	4700	94	3000	≥80
030331.5L23.342	30°	50	4500	90	3000	≥80
030331.5L23.343	42°	50	4600	92	3000	≥80
030331.5L24.341	22°	50	4700	94	4000	≥80
030331.5L24.342	30°	50	4500	90	4000	≥80
030331.5L24.343	42°	50	4600	92	4000	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
030331.5L21.331	330 165 145	320 150	154	1	2.5
030331.5L21.332	330 165 145	320 150	154	1	2.5
030331.5L21.333	330 165 145	320 150	154	1	2.5
030331.5L22.331	330 165 145	320 150	154	1	2.5
030331.5L22.332	330 165 145	320 150	154	1	2.5
030331.5L22.333	330 165 145	320 150	154	1	2.5
030331.5L23.341	390 195 165	375 175	108	1	3.5
030331.5L23.342	390 195 165	375 175	108	1	3.5
030331.5L23.343	390 195 165	375 175	108	1	3.5
030331.5L24.341	390 195 165	375 175	108	1	3.5

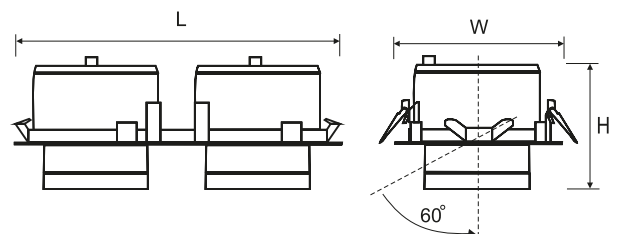

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
030331.5L24.342	390 195 165	375 175	108	1	3.5
030331.5L24.343	390 195 165	375 175	108	1	3.5

## OTHER PICTURES

---



Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.