



220-240V
50/60 Hz

IK
09

IP
65



Outdoor architectural illumination luminaire for for LED light sources.

TECHNICAL DATA

Mounting: on pillar

Body: high pressure die-cast aluminum

Colour: gray

ELECTRICAL DATA

Power supply efficiency: >95%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

OPTICAL DATA

Electrical connection: max 3x1,5 mm² wire

Light distribution: symmetric

Way of lighting: direct-indirect

Type of optic: O7 - for area lighting

Reflector: white

GENERAL DATA

Lifetime (L70B50): 50 000 h

Operating temperature range: -20°C ... +35°C

Available on request: DALI

Other remarks: assembly on a dedicated pole; the pole is not part of the luminaire; technical details and pole selection should be consulted with LUG


Warranty: 5 years

Application: pathways, avenues, residential, parks, promenade



Code	Light source / lamp	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
140522.5L01.003	LED	42	4200	100	4000	80

Code	Dimensions [mm] L W H	Pallet quantity	Net weight [kg]
140522.5L01.003	1440 960 7000	1	30.0

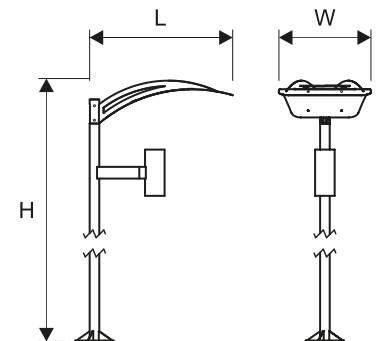

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.